

The Mini-Heater, SHS


The Mini-Heater, SHS is individually packed, self contained, and produces 12,000 BTU from a compact, 11.5"W X 14"H X 17.5"D , lightweight, 32 lbs., unit. It includes the fail-safe, non-flooding vaporizing burner which is controlled by adjusting the height of its carburetor. Designed for use with DF1, DF2, DFA, JP8, JetA1, and Kerosene.

The Mini-Heater is supplied with the following:

- 1 US gallon fuel tank
- Connections for 5 gallon Jerry can
- 5 foot length overflow hose and fittings
- 6 foot stainless steel telescoping stack
- Raincap with guylines
- Primer bulb
- Pot holding brackets
- Instruction plate
- Technical Manual
- Attached Spill Pan (11.5" x 17.5")

OPTIONAL ACCESSORIES

- Fuel supply hose
- Fuel can stand
- Gravity feed adapter
- Fuel Can (Jerry Can)

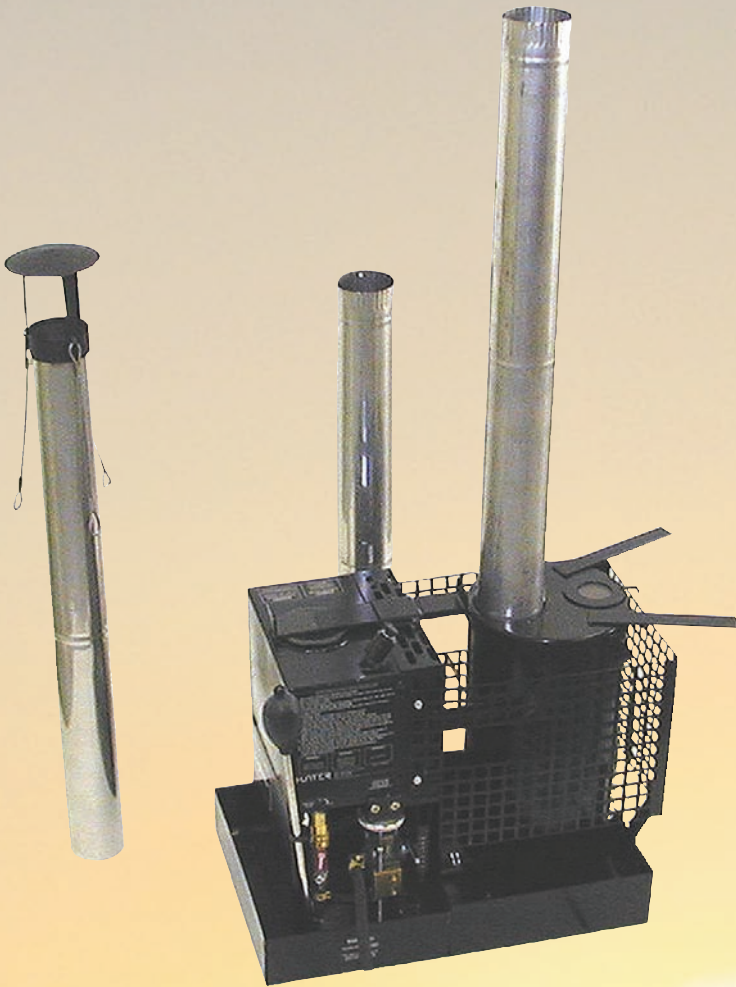

INTERNATIONAL THERMAL RESEARCH

www.itrheat.com